


The **TASQ** Line

Air Driven Liquid Intensifier Pump

A durable, air driven pump for intermittent flow and pressures with significantly longer service life.

- Pressures from 100 to 5,000 psi
- Flows to 3.0 GPM
- Sparkless Operation
- Teflon based seals – no lubricator needed
- Air Driven – no electricity required or unwanted heat generation
- Compact and portable (11 lbs.)

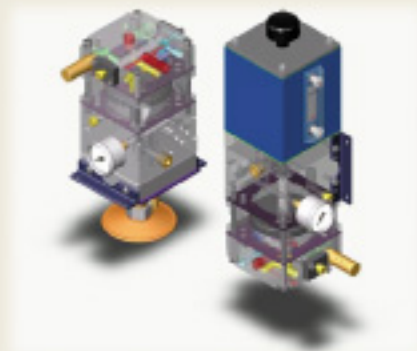

Tough • Affordable • Simple • Quality

Applications:

- Power Work Holding
- Crimping
- Presses
- Tensioning
- Torquing
- Static Pressure Testing



A World Above the Rest...

Interface Devices, Inc.

www.interfacedevices.com

Specifications.

- Aircraft Grade Aluminum Housing
- Twin PTFE Seals on Hard Chrome Piston Rod
- DO3 Valve Pad with 1/4 NPT A, B & GA Ports
- 200 Mesh Suction Strainer
- Twin 3/8 NPT Air Ports for Supply and/or Gage
- Compatible with Most Hydraulic Oils
- Requires Clean, Dry Regulated Air (150 psi max.)
- No Lubricator Required

Optional: 80 cu. in. Self Contained Reservoir



TASQ-60 for Power Work Holding

Custom configurations available - consult your local distributor or IDI

TASQ Ordering Information		
Model (number denotes ratio)	Stall Pressure * (psi)	Flow * (gpm)
TASQ-05	400	3.5
TASQ-10	800	2.0
TASQ-20	1,600	1.0
TASQ-30	2,400	0.65
TASQ-45	3,600	0.40
TASQ-60	4,800	0.30

* at 80 psi inlet air pressure. Flows at 20% of stall pressure
 To order, specify model and reservoir option:
 NOR= No Reservoir (includes 200 mesh strainer & gasket)
 SCR= 80 cu. in. Self Contained Reservoir, strainer, breather and sight gages

NOR

NON RESERVOIR VERSION:
 TANK TOP MOUNTING GASKET
 200 MESH SUCTION STRAINER
 (PIPES BY INSTALLER)

SCR

SELF CONTAINED RESERVOIR:
 80 CUBIC INCH CAPACITY
 VENT/FILL CAP
 SIGHTGAUGE
 RETURN OIL DEFLECTOR
 200 MESH SUCTION STRAINER

ORDER TODAY! CALL (800) 539-0193

Represented by:



Interface Devices, Inc.

230 Depot Road • Milford, CT 06460
 Tel: 203-878-4648 • Fax: 203-882-0885
 Toll Free: 1-800-539-0193
 www.interfacedevices.com
 email: info@interfacedevices.com